



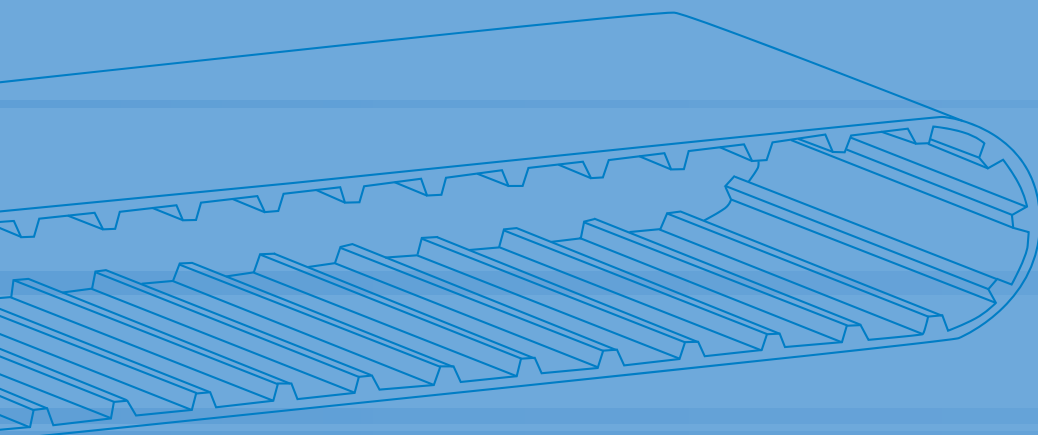

Positive Drive

DualDrive SP

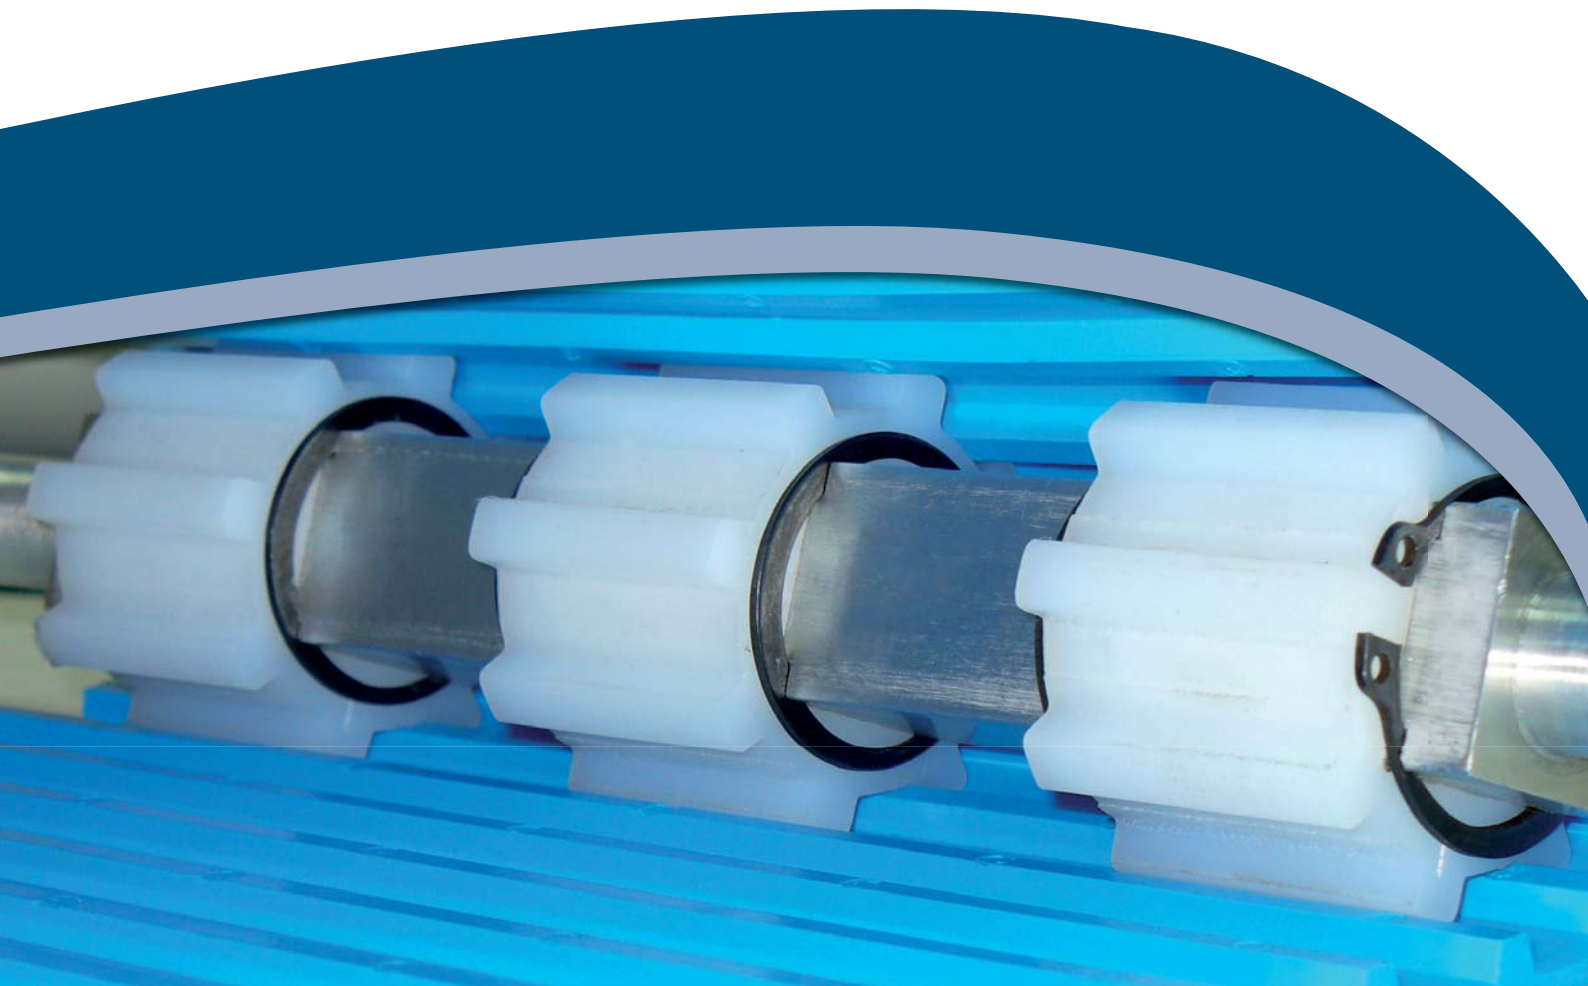

The Next Step in Belting

DualDrive SP


DualDrive SP (DD SP) is an important addition to the existing range of Volta Positive Drive flat belts and compliments the already successful SuperDrive™ and DualDrive belts. DualDrive SP leads the positive drive concept into small pulley applications.

Why Choose DualDrive SP?

- Works with small pulleys - 50 mm diameter (minimum)
- Requires a lighter conveyor construction
- Tight transfer of end-products between conveyors
- Reduces overall conveying costs

Hygienic and Easy to Clean


- Smooth surface on both sides prevents bacterial build-up
- No seams or factory splicing
- Low costs in sanitation and water treatment
- Shorter cleaning shifts - extended production time
- USDA/ FDA 3A-Dairy Certified

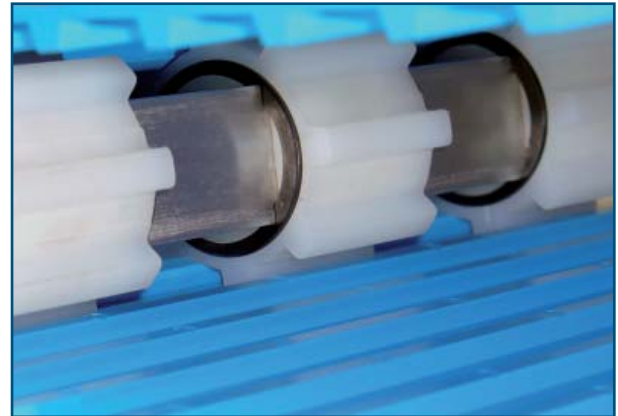

DualDrive SP pulleys: 50 mm diameter (8 teeth)

Positive-Drive Features

- Integral teeth drive the belt
- Minimum noise level - no modular components or joints
- Minimal tensioning of the belt is required
- Prevents slippage and belt elongation
- Low belt maintenance

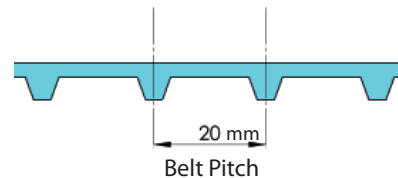

DualDrive SP belt has a homogenous and smooth surface and is designed to work with our unique smaller pulley diameters. The integrated teeth are extruded as part of the belt. For maximum performance, we recommend Volta supplied pulleys. These pulleys are designed for the DualDrive SP belt only and are made of high quality materials.

Product	FMB	FMB-ITO 50	FMB-IRT
Color	Blue	Blue	Blue
Thickness (mm)	2.5	2.5	3.2
Shore Hardness	95A/46D		
Temperature Range	-20° to +60° C		
Min.Pulley Diameter (mm)	50		
Pulley diameter (O.D)*	51.1mm, 64.5mm, 77.9mm, 91.3mm, 104.7mm*		
Food Approvals	FDA/USDA/3A Dairy		

* Non standard item



VOLTA Belting Technology Ltd.

USA

Tel: +1 973 276 7905
Fax: +1 973 276 7908
Tol Free: 1-877-VOLTAUS

EUROPE

Tel: +31-546-580166
Fax: +31-546-579508

www.voltabelting.com ■ e-mail: sales@voltabelting.com