
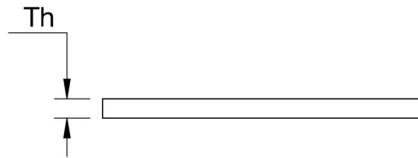


**FDR – MATERIAL for FABRICATIONS**  
**Hydrolysis & Chemical Resistant**  
**Bottom-Smooth, Top-Smooth**

Material:	<b>Volta DR</b>
Color (Indicative only)	<b>Blue 15</b> 
Hardness:	53D
Temp. Range (C°):	-30°C to 70°C
Temp. Range (F°):	-20°F to 158°F
Certification:	FDA/ USDA/USDA Dairy/EU Approved

Coefficient of friction (Dry):	
Steel:	0.55
Stainless Steel:	0.55
UHMW:	0.30



Product:	FDR-5	FDR-6	FDR-8
<b>Belt Thickness (mm)</b>	5	6	8
<b>Belt Weight (kg/ m<sup>2</sup>):</b>	6.3	7.26	9.68
<b>Belt Weight (lb/ ft<sup>2</sup>):</b>	1.25	1.49	1.98

- English dimensions have been converted from Metric measurements.
- All values are nominated and to the best of our experience are true and accurate.