


**SVPZ** Special Trapezoidal Aramid Cord Reinforced Profile

|              |                             |
|--------------|-----------------------------|
| Material:    | <b>Volta PZ, Dark Green</b> |
| Hardness:    | 86 A / 35D                  |
| Temp. Range: | -20 °C to +50 °C            |

|                           |      |
|---------------------------|------|
| Coefficient of friction : |      |
| Steel:                    | 0.40 |
| Aluminum:                 | 0.40 |

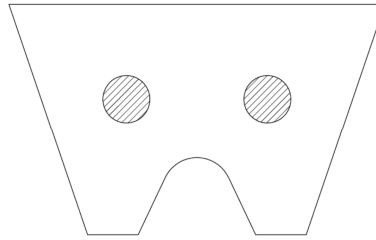

| BELT TYPE | DIMENSION<br>W X H<br>mm x mm | WEIGHT<br>Kg / m | MIN.<br>PULLEY<br>Ø<br>mm | MAX. WORK<br>LOAD<br>kg | PULLFORCE (Kg)<br>AT PRETENSION |     |     |
|-----------|-------------------------------|------------------|---------------------------|-------------------------|---------------------------------|-----|-----|
|           |                               |                  |                           |                         | 1 %                             | 2 % | 3 % |
| SVPZ-D/32 | 32 x 19.5                     | 0.58             | 190                       | 350                     | 100                             | 200 | 300 |

**Notes:**

1. Pull Force in tables relate to steel and aluminum pulleys.  
Multiply given values by 0.9 for cast iron and 0.8 for wet pulleys.
2. All values are nominal and to the best of our experience are true and accurate.