




# The Next Step in **Belting**

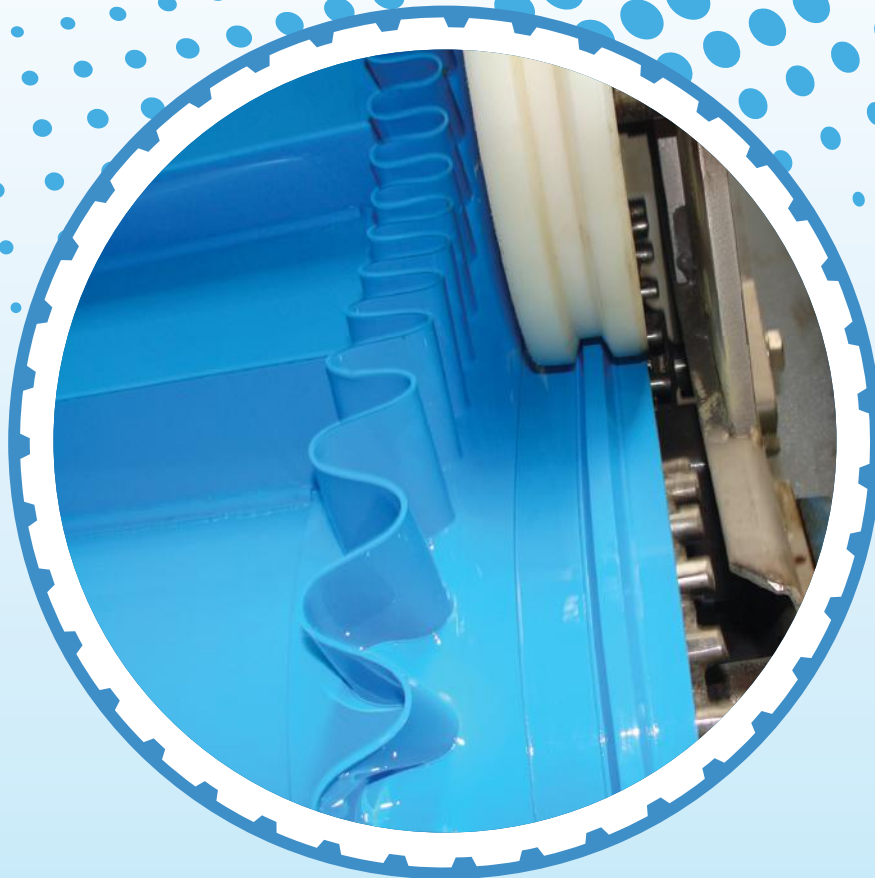

## Sidewalls with Base

Conveying Solutions

# Sidewalls Strips with Base




Volta Sidewalls are manufactured from our unique homogenous TPE materials and are especially designed to be fully compatible with all our flat belts. In addition, our sidewalls are compatible with most PU belts and some PVC belts. Welding our sidewalls is very easy and keeps the belt surface smooth, boosting the hygiene levels. This product line includes three color sidewalls for the different industries - white, green and blue. Because of its homogenous characteristics, Volta sidewalls are highly resistant to cutting, tearing, oils and abrasion. Our white and blue sidewalls conform to the highest international standards for food contact.

## Reasons to Use Volta Sidewalls:

- Fully compatible with all Volta flat belts
- Compatible with most PU and some PVC belts
- High resistance to cutting, tearing, oils and abrasion
- Long and reliable service life
- White (W) and Blue (MB) Sidewalls are FDA, USDA, EU certified, Declaration of Conformity in compliance with Food Contact Regulations: EU No.-10/2011, 1935/2004, 2023/2006 and relevant amendments and with the Requirements of Code of Federal Regulations (CFR21) USDA FDA article 21 CFR 177.2600.
- Suited to HACCP standards.

## VOLTA Sidewall strips with base

Product: Flexible Sidewalls - SW  
 Material: Volta W - White; B - Blue  
 Volta Z- Green 05  
 Compatibility: Volta M family materials  
 W - White  
 MB - Blue; MW - Beige:  
 Z - Green 05; G - Grey

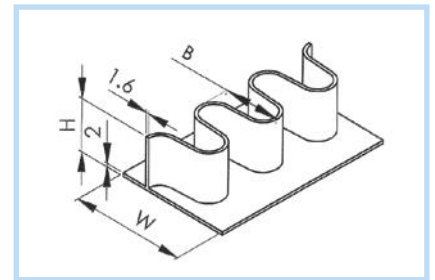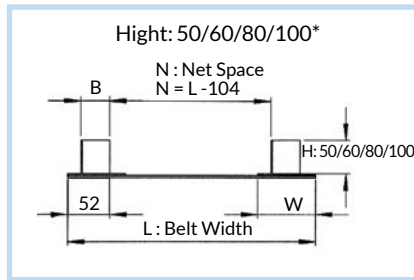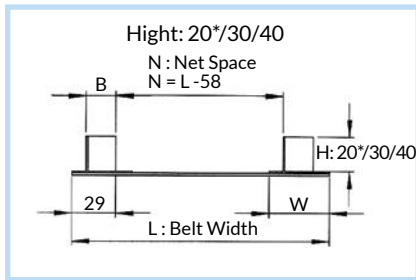

\*Non standard

Type	SW-20		SW-30		SW-40		SW-50		SW-60		SW-80		SW-100	
mm/inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
Height: H	20	25/32	30	1 1/4	40	1 1/2	50	2	60	2 3/8	80	3 1/8	100	4
Base Width: W	40	1 1/2	40	1 1/2	40	1 1/2	70	2 3/4	70	2 3/4	70	2 3/4	70	2 3/4
Wave Width: B	18	5/7	18	5/7	18	5/7	34	1 5/16	34	1 5/16	34	1 5/16	34	1 5/16
Weight (kg/meter)	0.17		0.21		0.24		0.39		0.42		0.52		0.62	
Minimum Pulley Diameter (Normal Flex)														
Belt Thickness	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
2	95	3 3/4	95	3 3/4	100	4	NR		NR		NR		NR	
2.5	100	4	100	4	110	4 3/8	NR		NR		NR		NR	
3	105	4 1/8	105	4 1/8	115	4 1/2	125	5	130	5 1/8	150	6	200	8
3.2	105	4 1/8	105	4 1/8	115	4 1/2	125	5	130	5 1/8	150	6	200	8
4	110	4 3/8	110	4 3/8	130	5 1/8	130	5 1/8	135	5 3/8	150	6	200	8
5	120	4 3/4	120	4 3/4	135	5 3/8	135	5 3/8	140	5 1/2	150	6	200	8

**Note:** Given MPD Dimentions Relate to Normal Flex. For Back Flex MPD Must Multiplied By X 1.5

The techniques for welding our Sidewalls on to the base belt remain basically unchanged. However, we recommend that you make several welding practice runs to acquaint yourself with the way the material responds. If you have any technical questions or would like to receive more information, please contact your local Volta distributor.



CORPORATE HEADQUARTERS  
 Sales and Manufacturing  
[sales@voltabelting.com](mailto:sales@voltabelting.com)

USA  
 Tel. +1 830 229 2384  
[voltaus@voltabelting.com](mailto:voltaus@voltabelting.com)

EUROPE  
 Tel. +31 546 580166  
[voltaeu@voltabelting.com](mailto:voltaeu@voltabelting.com)

ASIA  
 Tel. +84 251 352 1967  
[voltaasia@voltabelting.com](mailto:voltaasia@voltabelting.com)

