


VO- Trapezoidal Solid Profile (metric)

Material:	Volta O, Orange
Hardness:	83 A
Temp. Range:	-40° C to +55° C
Certification:	FDA

Coefficient of friction :	
Steel:	0.55
Aluminum:	0.55
Rubber:	0.65

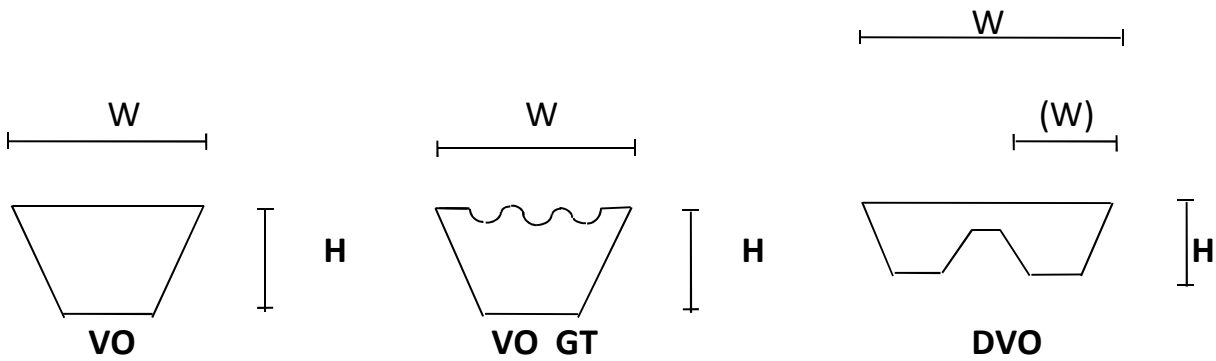

BELT TYPE	DIMENSIONS W x H mm x mm	WEIGHT kg / m	MIN. PULLEY Ø mm	MAX. WORK LOAD kg	PULL FORCE (kg) AT PRETENSION;		
					1 %	2 %	3 %
VO-3L	9.5 x 5.5	0.06	45	4	0.9	1.8	2.8
VO-13/A	13 x 8	0.10	50	7	1.6	3.2	4.8
VO-17/B	17 x 11.5	0.18	75	12	2.9	5.7	8.6
VO-22/C	22.x 14.5	0.29	100	19	4.6	9.4	14.3
VO-32/D	32 X 21.5	0.62	145	42	10.4	20.8	31.2
VO-B-GT	17.5 x 10.3	0.17	75	12	2.6	5.7	8.6
VO-C-GT	22.2 x 13.5	0.28	100	19	4.6	9.4	14.3
DVO-Z	24 (9.5) x 6.8	0.15	45	8	2.0	4.0	6.0
DVO-A	30 (12.7) x 8.0	0.22	50	14	3.2	6.4	9.6

Notes:

1. Pull Force in tables relate to grooved Steel, Aluminum and Cast Iron pulleys. Multiply given values by 0.7 for wet pulleys.
2. All values are nominal and to the best of our experience are true and accurate.